



## Espresso Omni XL / Instant Omni XL



### Placement and connections

This leaflet provides information about space- and connection requirements to ensure safe and successful installation, and operation of your coffee machine.

The installation technician takes care of equipment installation from the wall socket(s) and the water connection point. This excludes drilling of holes in the counter or table-top to guide power cords, hoses or chutes through.

Please consult your local JDE Professional helpdesk for more information and explanation.

Please see the product brochure for more detailed information regarding range of available drinks, specifications, options and accessories.

## Espresso Omni XL / Instant Omni XL



Placement and connections  
**THE BASIS FOR  
GREAT COFFEE**

## Espresso Omni XL / Instant Omni XL



### Placement and connections

Please observe the guidelines to maximize safety and performance

units of measurement = mm

Please consult your local JDE Professional helpdesk for more information and explanation.

Please see the product brochure for more detailed information regarding range of available drinks, specifications, options and accessories.



### ⚡ POWER SUPPLY

Power consumption (rated):  
1850W (230V) for Espresso,  
2350W (230V) for Instant  
Wall outlet with earth connection  
(in compliance with your local regulations),  
230VAC/50Hz, 16A  
Distance from machine : <1 mtr.

An additional power outlet is required for an optional cold water unit or accessories.

### 💧 WATER CONNECTION

(in compliance with your local regulations)  
Copper piping (or similar material -  
approved for drinking water supply)  
Non-return valve (mandatory in many  
countries – check your local regulations)  
Water tap : 3/4" or 3/8"  
Distance from machine : <1 m  
Water hose length : 1000 mm  
Dynamic pressure : min. 1 bar at 10 L/min  
Static pressure : max. 8 bar non-shock

### 📏 DIMENSIONS

H 1830 mm x W 600 mm x D 760 mm  
(+100 at the rear side for ventilation)  
Empty weight : ca. 135 kg (espresso)  
ca. 130 kg (Instant)

### OTHER

- ❗ The wall socket and water stop valve should be located in the same room as the equipment and easily accessible.
- ❗ Do not use power extension cords.
- ❗ The equipment is only suitable for indoor use. (temperature: 1 ~ 32 °C, humidity: <80% RH)
- ❗ Please check the ingredient packs for storage requirements and handling.


## Espresso Omni XL / Instant Omni XL




### Dimensions in detail

Additional detailed information concerning dimensions. (door opening)

units of measurement = mm

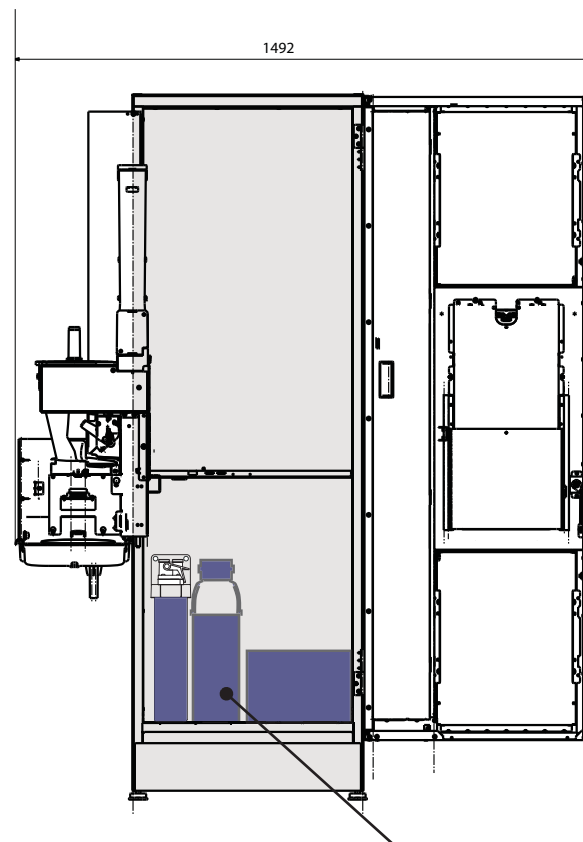

Position of filter and optional cold water unit

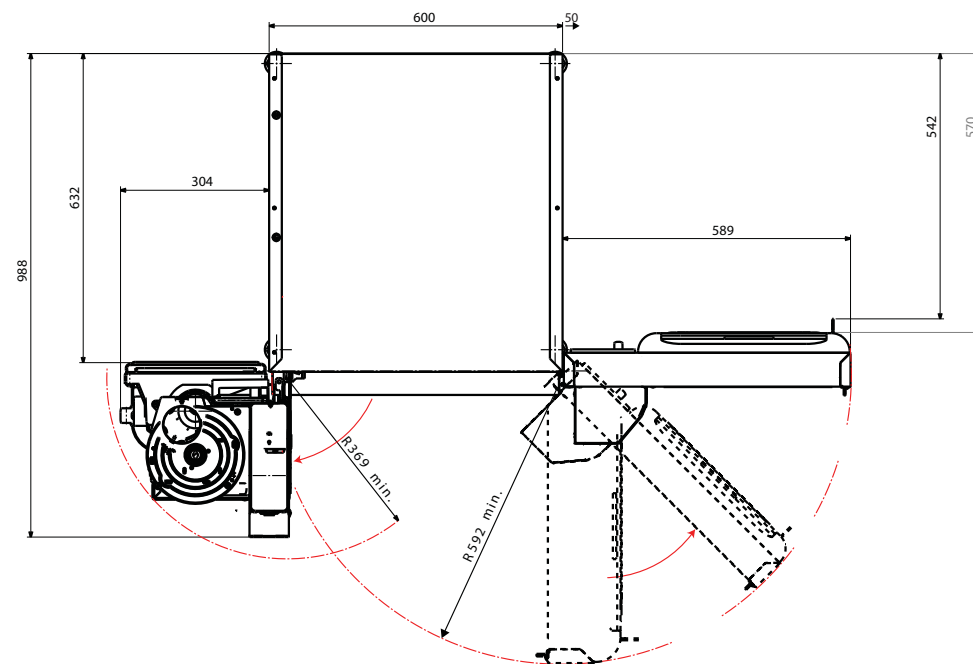

Please consult your local JDE Professional helpdesk for more information and explanation.

Please see the product brochure for more detailed information regarding range of available drinks, specifications, options and accessories.



## Espresso Omni XL / Instant Omni XL



### Dimensions in detail

Additional detailed information concerning dimensions. (cup dispenser)

units of measurement = mm

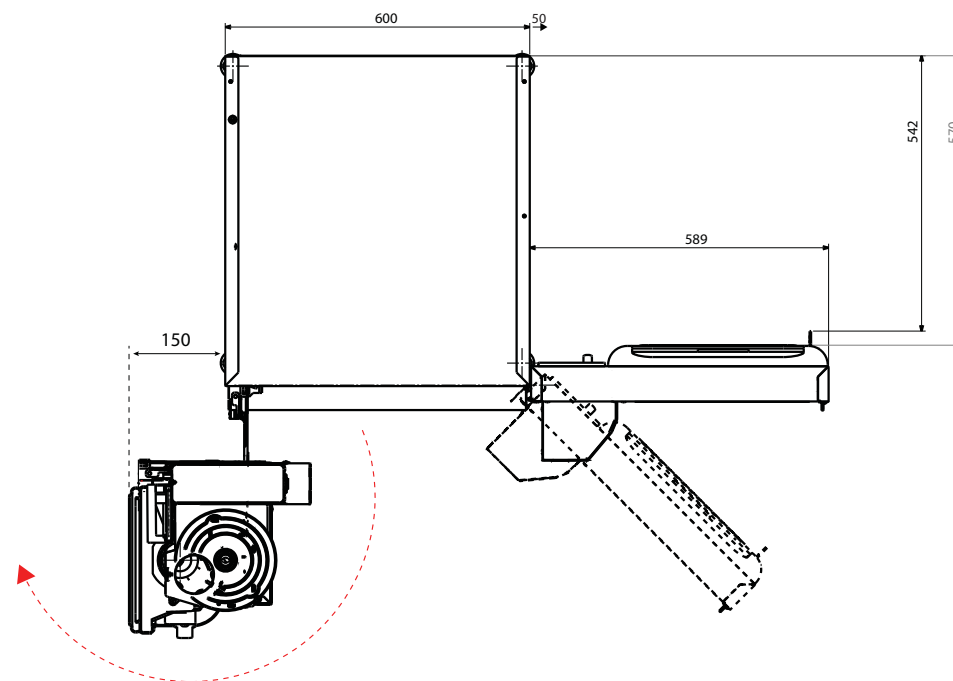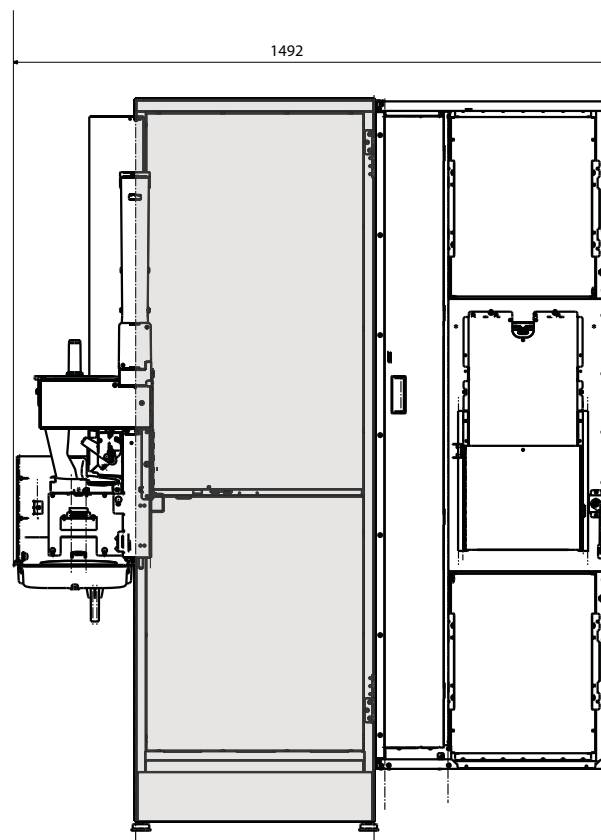

Please consult your local JDE Professional helpdesk for more information and explanation.

Please see the product brochure for more detailed information regarding range of available drinks, specifications, options and accessories.