



Placement and connections

This leaflet provides information about space- and connection requirements to ensure safe and successful installation, and operation of your coffee machine.

The installation technician takes care of equipment installation from the wall socket(s) and the water connection point. This excludes drilling of holes in the counter or table-top to guide power cords, hoses or chutes trough.

Please consult your local JDE Professional helpdesk for more information and explanation.

Please see the product brochure for more detailed information regarding range of available drinks, specifications, options and accessories.








Placement and connections


Please observe the guidelines to maximize safety and performance

units of measurement = mm

Please consult your local JDE Professional helpdesk for more information and explanation.


Please see the product brochure for more detailed information regarding range of available drinks, specifications, options and accessories.



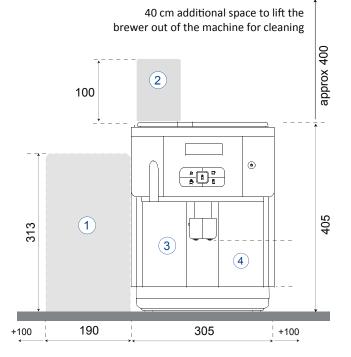

Expanation

- Space for refrigerator (optional)
- 2. Coffee beans container extension (optional)
- Waste bin
- Water tank





POWER SUPPLY

Power consumption (rated): 2200 W (230V) Wall outlet with earth connection (in compliance with your local regulations), 230VAC/50Hz, 16A Distance from machine: <1 mtr.

An additional power outlet is required for an optional cold water unit or accessories.

WATER CONNECTION (Fixed water option only)

(in compliance with your local regulations) Copper piping (or similar material approved for drinking water supply) Non-return valve (mandatory in many countries – check your local regulations)

Water tap: 3/4" or 3/8" Distance from machine: <1 m Water hose length: 1000 mm

Dynamic pressure: min. 1 bar at 10 L/min Static pressure: max. 8 bar non-shock

DIMENSIONS

H 405 mm x W 305mm x D 445 mm Add 100 ventilation space at the rear side. Overall space required with 400 mm extra space to lift the brewer out for cleaning H 805 mm x W 505 mm x D 550 mm

(Empty)weight: approx 15 kg

OTHER

- The electrical socket should not be located within a distance of 30 cm/12" or below the water connection point.
- The wall socket and water stop valve should be located in the same room as the equipment and easily accessible.
- i Do not use power extension cords.
- The equipment is only suitable for indoor use. (temperature: 1 ~ 32 °C, humidity: <80% RH)
- Please check the ingredient packs for storage requirements and handling.






Options and water treatment

Information concerning options, water filters and -softeners.

units of measurement = mm

Please consult your local JDE Professional helpdesk for more information and explanation.

Please see the product brochure for more detailed information regarding range of available drinks, specifications, options and accessories.

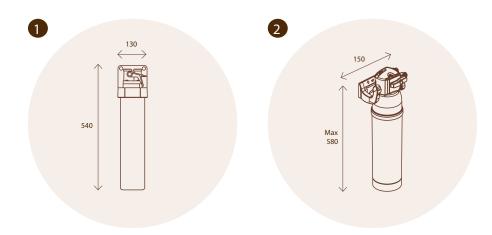

EXPLANATION

1. WATER FILTER

A filter may be necessary to optimize the water quality The max required space is: 540 (h) x 130 (b) x 130 (d)

2. WATER SOFTENING (> 8 ° DH)

A water softener is necessary if the water hardness exceeds 8 ° DH. The type required depends on the water hardness and daily number of consumptions.

The max required space is: 580 mm (l) x 150 mm (w) x 150 mm (d)













Dimensions in detail

A fixed water connection kit is available for the Schaerer Coffee Joy. Please find additional information on this page.

units of measurement = mm

Please consult your local JDE Professional helpdesk for more information and explanation.

Please see the product brochure for more detailed information regarding range of available drinks, specifications, options and accessories.

- The installation of the fixed water kit requires an additional power outlet (230VAC/50Hz, 16A) within 1 meter of the machine
- 1 Power outlet for the machine (rated power consumption 2,2 kW)
- 2 Power outlet for the fridge (optional, 40 W)
- 3 Power outlet for the fixed water kit (optional, 216 W)

